

Revision: -

Date: June 11, 2012



THE JOHNS HOPKINS UNIVERSITY

**APPLIED PHYSICS LABORATORY**

11100 JOHNS HOPKINS ROAD, LAUREL, MARYLAND 20723-6099

**Radiation Belt Storm Probes (RBSP)  
Space Weather Interface Control Document**

FSCM NO.

**88898**

SIZE

**A**

DRAWING NO.

**7417-9100**

REV.

**-**

SCALE

DO NOT SCALE PRINT

SHEET 1 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM

## Technical Content Approval

### Prepared/Approved by:

Nicola J. Fox  
RBSP Deputy Project Scientist

Michele B. Weiss  
RBSP Space Weather Lead

### Approved by:

Richard J. Fitzgerald  
RBSP Project Manager

Barry H. Mauk  
RBSP Project Scientist

James M. Stratton  
RBSP Mission Systems Engineer

Debbie A. Clancy  
RBSP Software Systems Engineer

Kim A. Cooper  
RBSP Deputy Project Manager, Instrument

David A. Artis  
RBSP Data Systems Engineer

Raymond J. Harvey  
RBSP Ground Segment Systems Engineer

W. Mark Reid  
RBSP Flight Software Lead

Dipak K. Srinivasan  
RBSP RF Telecommunications Lead

Richard J. Pfisterer  
RBSP System Assurance Manager

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 2 of 36

Released

### Technical Content Approval (continued)

The following personnel have reviewed/approved by display of e-mail response/signature for this release as cited below:

Harlan Spence  
ECT PI

----- Original Message -----


From: Harlan Spence <Harlan.Spence@unh.edu>  
To: Cooper, Kim  
Cc: Suther, Lora L.  
Sent: Tue Mar 13 16:51:41 2012  
Subject: Re: ACTION: Space Weather ICD ready for approval

Kim,


I approve the 7417-9100 RBSP Space Weather ICD, Rev -, distributed on 3/13/12.

Thank you,  
- Harlan


Craig Kletzing  
EMFISIS PI

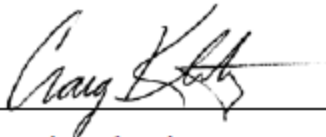  
\_\_\_\_\_  
Craig Kletzing  
EMFISIS PI

David Byers  
PSBR PI

  
\_\_\_\_\_  
David Byers  
PSBR PI

John Wygant  
EFW PI

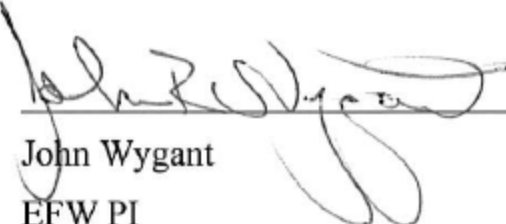  
\_\_\_\_\_  
John Wygant  
EFW PI

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 3 of 36

Released

### Technical Content Approval (continued)

The following personnel have reviewed/approved by display of e-mail response/signature for this release as cited below:

Louis Lanzerotti  
RBSPICE PI



Louis Lanzerotti

RBSPICE PI

Keith Goetz  
EFW Project Manager

----- Original Message -----

From: Keith Goetz <goetz@umn.edu>

To: Cooper, Kim

Sent: Tue Mar 20 14:07:35 2012

Subject: PDF-File-Verify-Sender:Re: ACTION: Space Weather ICD ready for approval

"I approve the 7417-9100 RBSP Space Weather ICD, Rev -, distributed on 3/13/12"

Here we are.

K

A Release stamp electronically affixed at bottom of the pages of this document certifies that the above personnel or designated alternates have approved this initial release. Please refer to the APL Product Lifecycle Management System (PLM) for record of these approvals.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 4 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM

## Revision Log

Revision	Date	Author	Description of Change
Draft	10/09/2009	Nicola J. Fox	Draft
Draft a	12/28/2011	Michele B. Weiss	Updated RBSPICE telemetry packets with actual energies. Added ECT/MagEIS Med35 packet. Updated ECT/HOPE packet definitions.
Draft b	2/1/2012	Michele B. Weiss	Clarification that the ECT/MagEIS medium 35 or 75 instrument can generate space weather data.
Draft c	2/14/12	Michele B. Weiss	Update EMFISIS packet definitions.
Draft d-	2/15/12	Michele B. Weiss	Updated when the Ephemeris Prediction is available
-		Michele B. Weiss	Original Release
		Michele B. Weiss	Added references to the CCSDS Blue Books, updated acronyms
-	4/24/12	Michele B. Weiss	Updated EMFISIS data rate
-	6/11/12	Michele B. Weiss	Initial Release

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 5 of 36

Released

## TABLE OF CONTENTS

<b>1</b>	<b>INTRODUCTION .....</b>	<b>8</b>
<b>1.1</b>	<b>Purpose.....</b>	<b>8</b>
<b>1.2</b>	<b>Scope.....</b>	<b>8</b>
<b>1.3</b>	<b>Configuration Management.....</b>	<b>8</b>
<b>1.4</b>	<b>Applicable Documents .....</b>	<b>8</b>
<b>1.5</b>	<b>References .....</b>	<b>9</b>
<b>2</b>	<b>RBSP PROJECT OVERVIEW .....</b>	<b>10</b>
<b>2.1</b>	<b>Payload and Mission .....</b>	<b>10</b>
<b>3</b>	<b>SPACE WEATHER BROADCAST DATA .....</b>	<b>13</b>
<b>3.1</b>	<b>Approach .....</b>	<b>13</b>
<b>3.2</b>	<b>Space Weather Data Set .....</b>	<b>14</b>
<b>4</b>	<b>IMPLEMENTATION AND LIMITATIONS OF THE SPACE WEATHER BROADCAST.....</b>	<b>16</b>
<b>5</b>	<b>RECEIVING THE SPACE WEATHER BROADCAST DATA .....</b>	<b>20</b>
<b>6</b>	<b>DOWNLINK AND TELEMETRY FORMATS.....</b>	<b>21</b>
<b>6.1</b>	<b>Telemetry Transfer Frame.....</b>	<b>21</b>
<b>6.2</b>	<b>Telemetry Frame Definition.....</b>	<b>21</b>
<b>6.3</b>	<b>Frame Virtual Channel .....</b>	<b>22</b>
<b>6.4</b>	<b>Frame Secondary Header.....</b>	<b>22</b>
<b>7</b>	<b>SPACE WEATHER PACKET DEFINITIONS.....</b>	<b>23</b>
<b>7.1</b>	<b>EMFISIS Space Weather Data .....</b>	<b>23</b>
<b>7.2</b>	<b>EFW Space Weather Data .....</b>	<b>24</b>
<b>7.3</b>	<b>ECT/HOPE Space Weather Data.....</b>	<b>24</b>
<b>7.4</b>	<b>ECT/MagEIS Space Weather Data.....</b>	<b>27</b>
<b>7.5</b>	<b>ECT/REPT Space Weather Data .....</b>	<b>28</b>

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 6 of 36

Released

7.6	RBSPICE Space Weather Data .....	29
7.7	PSBR/RPS Space Weather Data.....	30
8	PREDICTED EPHEMERIS FILES.....	31
9	SPACE ASSET PROTECTION POLICY IMPLICATIONS .....	32
10	INSTITUTIONAL RESPONSIBILITIES .....	33
10.1	Radiation Belt Storm Probes Mission .....	33
10.2	NASA Program Office .....	33
10.3	Ground Station Partners .....	33
11	COMMUNICATION BETWEEN RBSP AND THE PARTICIPATING GROUND STATIONS .....	34
	APPENDIX A: ACRONYMS .....	35

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 7 of 36

Released

# 1 INTRODUCTION

## 1.1 PURPOSE

The Radiation Belt Storm Probe (RBSP) Space Weather ICD presents a high-level strategy for the generation and broadcasting of real-time space weather data from the RBSP instruments. The space weather data to be broadcast from RBSP comprises a small fraction of the scientific data obtained by the instruments. The broadcasts are intended to be received by ground stations supplied, operated, and funded by interested parties external to the RBSP Program and Project.

## 1.2 SCOPE

The ICD defines the data products from each RBSP instrument, data products to be supplied by the Mission Operations Center (MOC), and the necessary information needed by a ground station for the capturing the broadcasted data.

Specific aspects addressed in this ICD are:

1. Space weather broadcast data
2. Implementation and limitations of the space weather broadcast
3. Information on how to receive the space weather data
4. Downlink and telemetry formats
5. Data packet definitions
6. Space asset protection policy implications
7. Institutional responsibilities

## 1.3 CONFIGURATION MANAGEMENT

The data contained in this document represents the current definition of the Radiation Belt Storm Probe Mission Space Weather Interface Control Document. This document, after formal release, shall be revised only through the formal change control procedures as described in the RBSP Configuration Management Plan.

## 1.4 APPLICABLE DOCUMENTS

	Level 1 Requirements for the Radiation Belt Storm Probes Mission
7417-9013	RBSP Mission Requirements Document (MRD)
7417-9148	RBSP Science Team Allocated Requirements Document (STARD)
7417-9016	RBSP Concept of Operations
7417-9050	RBSP Mission Operations Center (MOC) to RBSP Science Operations Center (SOC) and Interface Control Document (ICD)
7417-9129	RBSP Science Data Management Plan (SDMP)

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	8 of 36



7417-9105     RBSP Mission Operations Center (MOC) Data Products Document

7417-9097     RBSP Spacecraft to Satellite Communications Facility (SCF) to Mission  
Operations Center (MOC) Interface Control Document (ICD)

7417-9609     RBSP Ground Software to Flight Software Interface Control Document

## 1.5 REFERENCES

1. CCSDS 133.0-B-1 Space Packet Protocol. Blue Book. Issue 1. September 2003.
2. CCSDS 132.0-B-1 TM Space Data Link Protocol. Blue Book. Issue 1. September 2003.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 9 of 36

Released

## 2 RBSP PROJECT OVERVIEW

### 2.1 PAYLOAD AND MISSION

The RBSP mission targets Earth's radiation belts of magnetically trapped, very high energy electrons and ions. Its scientific objective is to understand, ideally to the point of predictability, how populations of high energy relativistic electrons and penetrating ions in space are produced and change in response to the variable inputs of energy from the Sun. The mission comprises 2 near-sun oriented observatories, which are spin stabilized ~5 rpm with a spin-axis oriented 16°-20° from the Earth-Sun line, and that reside in nearly identical, highly elliptical, near equatorial orbits with apogees just below 6 Earth radii geocentric (Figure 1). The observatories have an operational design life of 2 years. The understanding gained by RBSP will enable us, in the future, to better protect space assets in near-Earth environment. In addition to the scientific data returned to achieve this understanding, the RBSP mission provides a 1 kbps space weather broadcast in support of real time space weather modeling, forecast and prediction efforts.

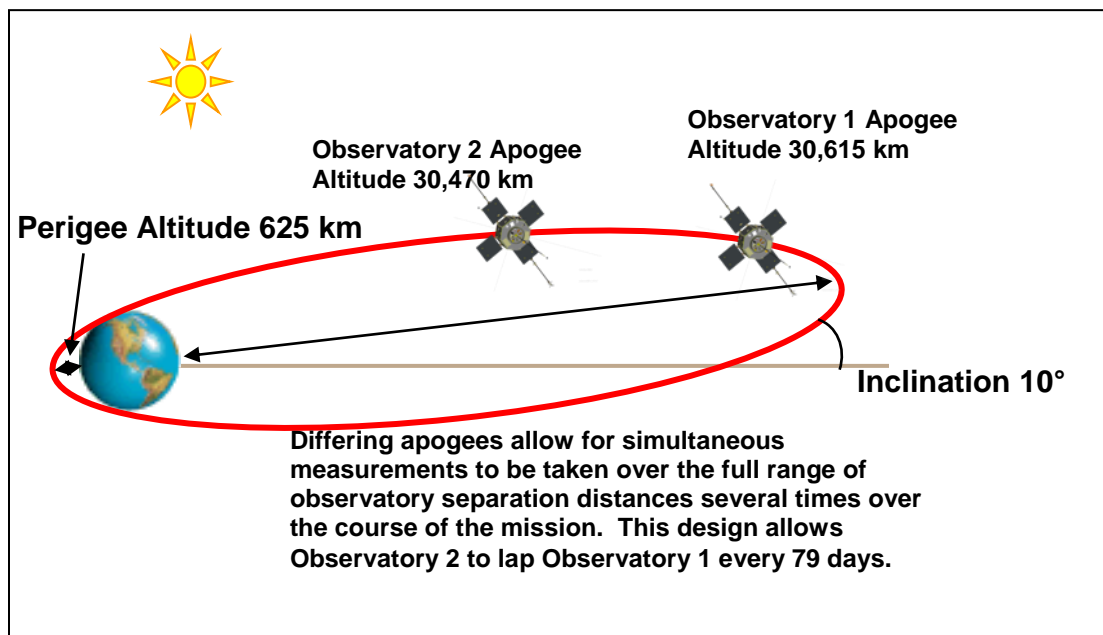


Figure 1. Orbit configuration of the RBSP spacecraft

The unusual orbit of the RBSP spacecraft will provide great insight into many regions of the radiation belts. The highly elliptical orbit of RBSP will provide data from the non-traditional

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 10 of 36

orbital locations - operational monitoring satellites are usually at or near geosynchronous orbit. For 3-D specification models, these altitude-varying profiles will provide greater sampling of Earth's radiation environment

It has always been an important objective that the space weather broadcasts not become a cost driver on the mission. Thus, there is no dedicated space weather beacon or transmitter aboard the spacecraft, but rather the space weather data will be broadcast in real-time through the primary spacecraft RF system, used for the science downlink. The observatory will broadcast space weather when it is not in a primary mission-related ground contact. The data will be received by users that maintain and fund their own ground station antennas. NASA headquarters is responsible for the identification of users and for programmatic interfaces between the users and the RBSP Project.

It is desirable that as much of the Space Weather Broadcast data be captured in real-time as possible. Because of the geometry of the mission configuration of spacecraft orientations and orbits, the RBSP mission presents challenges for generating broadcasts that can be received continuously by ground stations, in the fashion of the ACE and STEREO missions. The data capture is limited by the availability of space weather ground stations and the poor downlink geometry for portions of the mission. Additionally, the real time coverage will be reduced by an average of 2.5 hours for each observatory per day due to primary mission contacts. Often one of the two observatories will still be available because many contacts with each observatory do not overlap.

Each of the RBSP payload instruments will be participating in the real-time space weather broadcast. The RBSP payload includes the following science investigations:

1. The Energetic Particle, Composition and Thermal Plasma Suite (ECT). This investigation will determine the spatial, temporal, and pitch angle distributions of electrons and ions over a broad and continuous range of energies, from a few eV to > 10 MeV for electrons, and from a few eV to many 10's of MeV for ions. It is designed to differentiate the causes of particle acceleration mechanisms, understand the production of plasma waves, determine how the inner magnetospheric plasma environment controls particle acceleration and loss, and characterize source particle populations and their transport. The investigation will provide a complete complement of data analysis techniques, case studies, theory, and modeling, along with expertise to define particle acceleration mechanisms, radiation belt particle enhancement and loss, and determine how the near-Earth environment controls those acceleration and loss processes.
2. The Electric and Magnetic Field Instrument Suite and Integrated Science (EMFISIS). This investigation will provide the observations needed to determine the origin of important plasma wave classes and their role in particle acceleration and loss processes. The investigation will also quantify the evolution of the magnetic field that defines the basic coordinate system controlling the structure of the radiation belts and the storm-time ring current. EMFISIS will provide calculations of on board spectra, including spectral matrices, making it possible to determine wave normal angles and Poynting fluxes for the plasma waves of interest and providing information for wave mode identification and propagation modeling which are

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 11 of 36

Released

essential for understanding and modeling of radiation particle physics. EMFISIS will also measure the upper hybrid frequency, permitting accurate determination of the electron plasma density required for analysis of wave propagation and instability growth rates.

3. Electric Field and Waves (EFW) Instrument. The investigation will provide the observations needed to understand the electric field properties associated with particle energization, scattering and transport, and the role of the large-scale convection electric field in modifying the structure of the inner magnetosphere. EFW measurements of the spacecraft potential will be used to infer the ambient plasma density.

4. Radiation Belt Storm Probes Ion Composition Experiment (RBSPICE). This investigation will provide observations that accurately resolve the ring current pressure distribution needed to understand how the inner magnetosphere changes during geomagnetic storms and how that storm environment supplies and supports the acceleration and loss processes involved in creating and sustaining hazardous radiation particle populations.

5. The Proton Spectrometer Belt Research (PSBR). This investigation will determine the upper range of proton fluxes, up to ~2 GeV, in the inner magnetosphere and develop and validate models of the Van Allen radiation belts.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 12 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM

### 3 SPACE WEATHER BROADCAST DATA

#### 3.1 APPROACH

The RBSP instrument suites will select space weather data to be broadcast from their collected science data on board the observatories. The instruments will choose space weather data from measurements based on information normally available to the instrument. The data subset includes particle fluxes, at a variety of energies, and magnetic and electric field data as detailed in the table below. The exact energy and frequency ranges are subject to review as the instrument teams continue to refine their selection of data products.

The implementation for PSBR/RPS is different than for the other RBSP instruments. Their housekeeping packet will be broadcast once every second and the space weather products are embedded within this packet. The details of their housekeeping packet are in Section 7. Packet size = 38 bytes @ 1 per second = 304 bps. The two space weather products are given in bytes 10, 12 and 34. Specifically these are PEN and CHE rates - 1-second coincidence rates as fluxes ( $>50$  ~MeV, and  $> \sim 400$  MeV protons) – and the onboard dosimeter data which come in as multiplexed voltages from a linear (quick rollover) and logarithmic (slow rollover) dose accumulator. An algorithm for unpacking these data will be provided to the users by the PSBR team.

In addition to the real-time products, it is a goal for a “quick look” product to be produced by each of the individual instrument Science Operations Centers (SOC). These products will essentially “fill in the gaps” caused by times when the broadcast data cannot be received and also provide a more complete data set for use in the diagnostics of anomalies at LEO and MEO.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 13 of 36

### 3.2 SPACE WEATHER DATA SET

Table 1 shows the space weather data products that will be generated by the various sensors on RBSP and included in the space weather broadcasts.

**Table 1. RBSP Real Time Data Set**

<i>Instrument</i>	<i>Measurement</i>	<i>Energy</i>	<i>Cadence</i>	<i>Data Rate (bps)</i>	<i>Space Weather APID</i>
EMFISIS/MAG	Vector Magnetic Field	NA	1 vector/12 seconds	24	0x28C
EMFISIS/Waves	VLF Wave Power	NA	Electric field spectral density at 3 frequencies every 12 seconds; Magnetic field spectral density at 3 frequencies every 12 seconds		
EFW	Vector Electric Field	NA	1 vector/spin	18.66	0x26A
	Spacecraft Potential	NA	Once/spin		
ECT/HOPE	Electrons	24.54 eV, 281 eV, 10.9 keV, 42.9 keV **	Once/24 seconds*	76	0x22C (ions) 0x22D (electrons)
	Protons	24.54 eV, 281 eV, 10.9 keV, 42.9 keV	Once/24 seconds*		
	Oxygen Ions	24.54 eV, 281 eV, 10.9 keV, 42.9 keV	* Ions and electrons are sampled alternately every other spin		
	Helium Ions	24.54 eV, 281 eV, 10.9 keV, 42.9 keV			
ECT/ MagEIS	Energetic Electrons	30 keV 60 keV, 100 keV, 300 keV, 600 keV, 1 MeV, 2 MeV	Once/spin	105.6	0x34A (Low electrons) 0x36A (Med75 electrons) 0x375 (High electrons) 0x382 (High protons)
	Energetic Protons	1 MeV			
ECT/REPT	Very Energetic Electrons	2 MeV, 5 MeV, 10 MeV	Once/spin	14.4	0x201
	Energetic Protons	>20 MeV, >50 MeV, >70 MeV			
RBSPICE	Energetic Protons	50 keV, 100 keV, 150 keV, 300 keV, 1 MeV, 10 MeV	Once/spin	136	0x311

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 14 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM

PSBR/RPS	Energetic Protons	>50 MeV, >400 MeV	Once/1 seconds	304	0x2C1
	Dosimeter Data	Linear and Log outputs (Volts)			


\*\* ECT/HOPE has 16 different energy sweep tables, with table 0 being the nominal sweep. Picking data off for space weather is based solely on the step number within the in-use sweep table, so when HOPE is not using the nominal table (table 0) the selected energies may not be 25, 300, 10k, and 40kev. The ESA sweep table that was in use when the space weather data was generated is reported in the ESA\_TABLE field included in each packet.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 15 of 36

Released

## 4 IMPLEMENTATION AND LIMITATIONS OF THE SPACE WEATHER BROADCAST

The RBSP mission observatories will communicate with the ground via S-Band using an 8W Solid State Power Amplifier (SSPA) transmitters. The observatory pointing geometry, orbit, and spin stabilization determines communication system requirements. Earth location, as viewed from the spacecraft, covers a very broad angle space (mast angle) as shown in the required RBSP antenna angle coverage plot below (Figure 2). Contact geometry necessitates onboard antennas that have broad angular coverage and low gain.

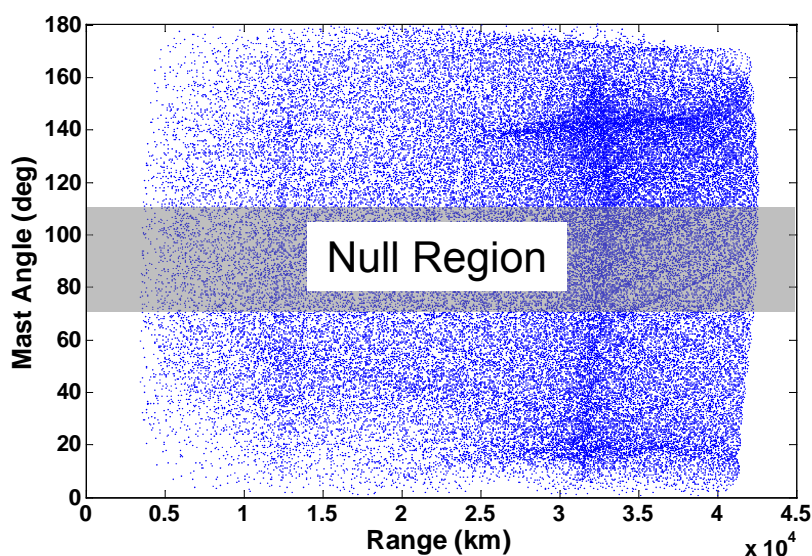


**Figure 2: Required RBSP Antenna Angle Coverage**

The coverage is maximized within practical limits using two low gain antennas. The two RF antennas' boresights are aligned with the spacecraft spin- and anti-spin-axes, providing coverage from their boresight to 70°. Despite maximizing the antenna coverage, there is still a 40° null band, depicted in Figure 2 as the gray patch in the antenna angle coverage plot. Both antennas are active at all times, as there is no active switching between antennas. Instead, a passive splitter/combined sums the antenna patterns. The top antenna and bottom antenna generate circularly polarized emissions with RBSP A using Right Hand Circular Polarization and RBSP B using Left Hand Circular Polarization. The spacecraft and antenna patterns are illustrated in Figure 3.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 16 of 36




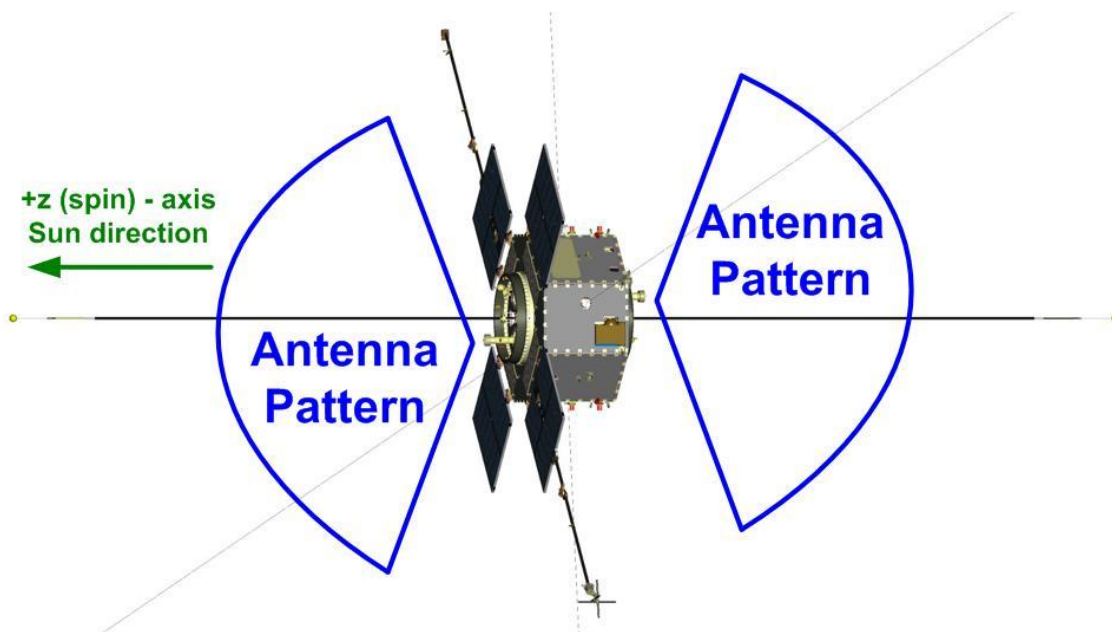

**Figure 3: RBSP RF Antenna Coverage**

The antenna coverage to Earth depends on orbit geometry that seasonally varies as illustrated in Figure 4 – a view of the orbit changes as seen from a vantage pointing looking down on the Earth from the North Pole. Although antenna coverage is large, there are times when the antenna patterns are not aligned with the Earth. The large eccentricity of the orbit causes larger periods of time when antennas are not in view during certain times of the year because the relative angle between the observatory and Earth changes slowly over long periods of time. Observatory orbits are at a low inclination ( $10^\circ$ ) and the orbit harmonics cause the apogee and perigee to drift between northern and southern hemispheres. Stations near the equator will have the best year-around coverage while high latitude stations may have some limits in coverage over portions of the orbit for parts of the year.


FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 17 of 36

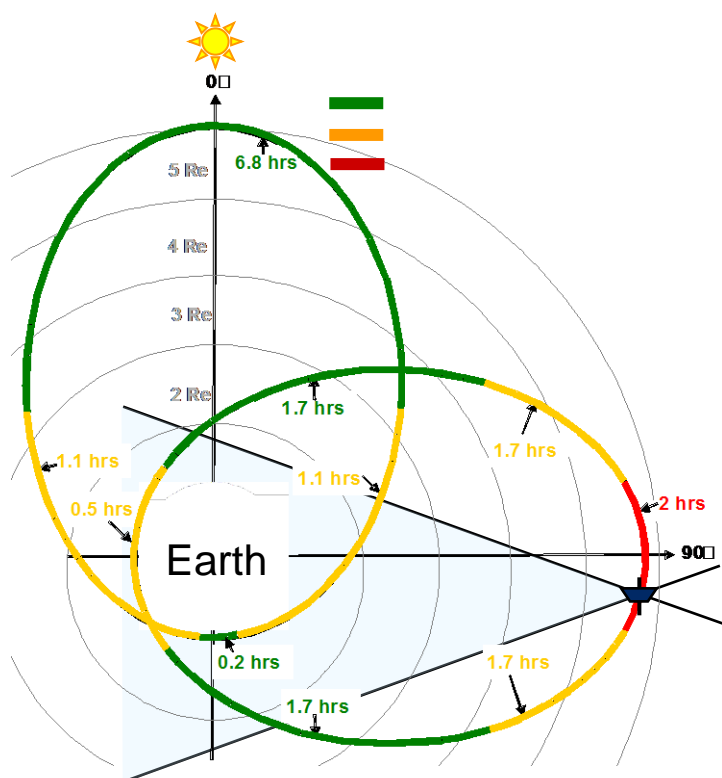

**Figure 4: Degree of antenna coverage due to seasonal variations**

For the potential ground reception of the space weather broadcast, the maximum observatory contact duration as a function of the number of ground stations can be maximized by using multiple stations with longitudinal diversity. The plot below (Figure 5) shows the coverage for 1, 2, 3 and 4 ground stations with maximum angular separation – i.e. 2 are separated by  $180^\circ$ ; 3 by  $120^\circ$ ; and 4 by  $90^\circ$ . The peaks and valleys in potential contact periods are primarily due to seasonal effects on observatory antenna coverage. Normal observatory contacts (i.e. downlinking of science data and uplinking commands etc.) would reduce available time for space weather by an average of 2.5 hours per observatory per day ( $\sim 10\%$  per observatory).

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 18 of 36

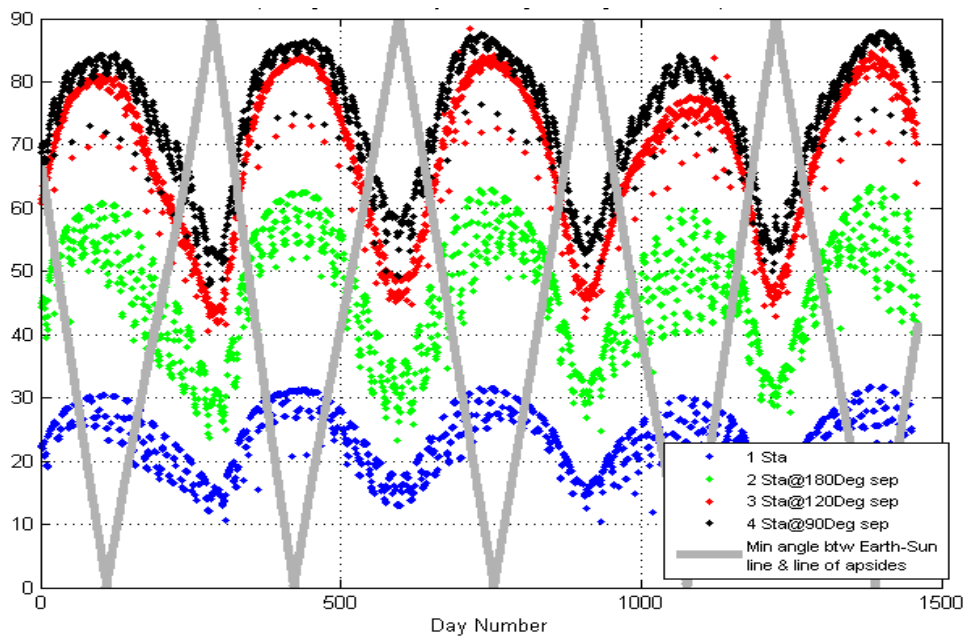

- **Assumptions:**
- Visibility averaged over 3 day increments
- Two 70° half angle antennas
- Generic ground stations assumed at 35° N latitude

**Figure 5: Average Contact Time per Day (%)**  
**Min. Angle Between Earth-Sun Line & Line of Apsides (deg)**

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 19 of 36

Released

## 5 RECEIVING THE SPACE WEATHER BROADCAST DATA

Each RBSP spacecraft provides a 1 kbps space weather broadcast-rate, 1/2 convolutionally encoded, direct-on-carrier phase modulation, bi-phase data. The mission will use a modulation index of 0.9 radians during space weather broadcast (Table 2). This choice enables a 5-m ground station dish with a noise temperature of 390K to close out the space weather link when the spacecraft are at apogee. Table 3 provides the broadcast carrier frequencies.

**Table 2: Telemetry Mode for Space Weather**

Bit Rate (bps)	Encoding	Symbol Rate (ksps)	Carrier Modulation	Data Format	Network
1000	Conv. 1/2	2000	PM, 0.9 rad peak	Biphase	Space Weather

The RBSP Command and Data Handling (C&DH) subsystem will provide real-time space weather packets in CCSDS telemetry packets downlinked as CCSDS frames. The frame format is defined in Table 4. The space weather packets will be broadcast in real time when not in a ground contact. The space weather data will not be recorded on the on-board Solid State Recorder. Each RBSP instrument will provide their space weather data in separate CCSDS telemetry packets (the same scenario that is used for the STEREO mission). Each packet has a unique APID. RBSP Mission Operations controls when Space Weather is downlinked and what packets are provided. Nominally, at the end of a ground contact, the C&DH subsystem is configured to flow Space Weather data in real-time at the downlink configuration and rates mentioned in this ICD.

**Table 3. RF Downlink Parameters.**

Parameter	RBSP-A	RBSP-B
Spacecraft ID	16A	16B
Downlink		
Transmit frequency	S-band	S-band


FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 20 of 36

## 6 DOWNLINK AND TELEMETRY FORMATS

### 6.1 TELEMETRY TRANSFER FRAME

The transfer frame contains a primary header and secondary header followed by a frame data field which consists of one or more telemetry packets. This structure is shown below in figure 6. The frame ends with a 16-bit Frame Error Control Field and the 32-bit Command Link Control Word (CLCW) for the virtual channel.

Telemetry packets contained within the transfer frame may be variable length. Thus telemetry packets may span across transfer frames and the start of a new transfer frame will not ordinarily be aligned with the start of a telemetry packet.

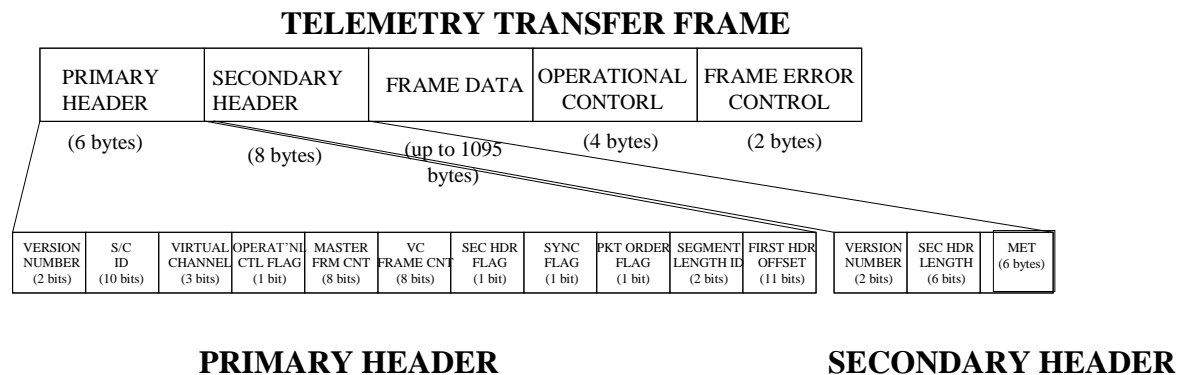

**Figure 6: Telemetry Transfer Frame Format**

### 6.2 TELEMETRY FRAME DEFINITION

Table 4 provides the contents of the Space Weather telemetry frames and the CCSDS telemetry protocol is defined in Reference 2.

**Table 4: Telemetry Frame Contents**

Bit Field	Length (bits)	Value (binary)	Description
<b>Transfer Frame Primary Header</b>			<b>6 bytes</b>
Transfer Frame Version No	2	00	
Spacecraft ID	10	0101101010 or 0101101011	RBSP ID (0x16A OR 0x16B)
Virtual Channel	3	101	VC05 for 8920 bit space weather

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 21 of 36

ID			
Oper. Controlled Field Flag	1	1	Oper. Controlled Field Used
Master Channel Frame Count	8	0 - 255 (decimal)	Incrementing counter
Virtual Channel Frame Count	8	0 - 255 (decimal)	Incrementing counter
Transfer Frame Secondary Header Flag	1	1	Secondary header present
Synch. Flag	1	0	
Packet Order Flag	1	0	
Segment Length ID	2	11	
First Header Pointer	11	Variable	Pointer to first byte in data field
<b>Transfer Frame Secondary Header</b>			<b>8 bytes</b>
Transfer Frame Secondary Header Version	2	00	
Transfer Frame Secondary Header Length	6	000111	07 = 8 bytes - 1 (CCSDS std def)
MET Source	8	0 1	MET latched MET calculated
MET Seconds	32		MET Seconds
MET Subseconds	16	0-50000 (decimal)	MET subseconds (LSB = 20 usec)
Frame Data	1095 bytes	Variable	1115 bytes/frame - 6 bytes (Prim. hdr) - 8 bytes (Sec. hdr.) - 4 bytes (Oper. Ctl. Wd.) - 2 bytes (Err. Ctl. Fld.) = 1095 bytes
Transfer Frame Operational Control Field	32		Required - contains CLCW
Transfer Frame Error Control Field Data	16		Appended by H/W as documented in the CCSDS Blue Book, Reference 1

### 6.3 FRAME VIRTUAL CHANNEL

Space Weather will use Virtual Channel (VC) 5. The frame length is of 8920 bits (1115 bytes)

### 6.4 FRAME SECONDARY HEADER

The definition of fields for the downlink telemetry frame secondary header is defined in Table 4.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	22 of 36

Released

## 7 SPACE WEATHER PACKET DEFINITIONS

Tables 6-17 containing details for each APID in Table 1 are provided here

### 7.1 EMFISIS SPACE WEATHER DATA

**Table 6. EMFISIS Space Weather Packet (APID 0x28C)**

<i>Field Description</i>	<i>Start Bit</i>	<i>Size (bits)</i>	<i>Note</i>
<b>CCSDS Version</b>	0	3	Value is always zero (0)
<b>Pkt Type</b>	3	1	0=telemetry
<b>Sec. Hdr. Flag</b>	4	1	1=has secondary header
<b>Application ID</b>	5	11	<b>EMFISIS</b> APID
<b>Grouping Flags</b>	16	2	CCSDS definition of grouping flags: 3 – not part of group
<b>Sequence Count</b>	18	14	Increments with each new packet. Value is 0 - 16383
<b>Packet Length</b>	32	16	Data size, number of bytes following the “Packet Length” minus 1, (value is always ODD)
<b>MET Seconds</b>	48	32	Packet Time (sec). Value is 0 - 4294967295
<b>MET SubSeconds</b>	80	16	50 microseconds/tic. Value is 0 - 19999
<b>Spin Phase at 1 PPS</b>	96	16	Spin Phase @ 1 PPS from Time and Status Messages
<b>MET of Spin Phase 1 PPS</b>	112	16	Low 16 bits of MET from the 1 PPS associated with the Spin Phase in the Time and Status Message
<b>Magnetometer Calibration Signal State</b>	128	1	0=off, 1=on
<b>Magnetometer Range</b>	129	2	00: 256 nT 01: 4096 nT 10: not used 11: 65536 nT
<b>Spare</b>	131	13	
<b>Mag X Component</b>	144	16	
<b>Mag Y Component</b>	160	16	
<b>Mag Z Component</b>	176	16	
<b>Waves Parameter 1</b>	192	16	
<b>Waves Parameter 2</b>	208	16	
<b>Waves Parameter 3</b>	224	16	
<b>Waves Parameter 4</b>	240	16	
<b>Waves Parameter 5</b>	256	16	
<b>Waves Parameter 6</b>	272	16	

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	23 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM

## 7.2 EFW SPACE WEATHER DATA

**Table 7. EFW Space Weather Packet (APID 0x26A)**

<i>Description</i>	<i>Start Bit</i>	<i>Size (bits)</i>	<i>Mnemonic</i>
CCSDS Version	0	3	Value is always zero (0)
Pkt Type	3	1	0=telemetry
Sec. Hdr. Flag	4	1	1=has secondary header
Application ID	5	11	EFW APID
Grouping Flags	16	2	CCSDS definition of grouping flags:3 – not part of group
Sequence Count	18	14	Increments with each new packet
Packet Length	32	16	Data size, number of bytes following the “Packet Length” minus 1, (value is always ODD)
MET Seconds	48	32	Packet Time (sec)
Shared Status	80	8	(ISDM0)
	80	4	TBD (ISDM0)
Sweep State [0..3] = Off, V12, V34, V56 sweeping	84	2	SWEEP_STATE (ISDM0)
AXB Aft Illumination Mode	86	2	AFT_ILLUM (ISDM0)
Requested Burst Support Bits	88	8	EXT_SUPPORT_REQ
Configuration and Evaluation Function	96	8	EXT_STATUS_FUNC
Value Calculated by Evaluation Function	104	8	EXT_STATUS_VAL
Spacecraft Potential = AVG (0.5*(V1+V2))	112	16	SC_POTENTIAL
Vector E-Field Offset A	128	24	Ex_OFFSET
Vector E-Field Cosine Term B	152	24	Ex_COSINE
Vector E-Field Sine Term C	176	24	Ex_SINE
Vector E-Field Standard Deviation of the Fit	200	24	Ex_STDDEV
Used to make quad word length	224	0	Spare

## 7.3 ECT/HOPE SPACE WEATHER DATA

**Table 8. ECT/HOPE Space Weather Packet for ions (APID 0x22C)**

<i>Description</i>	<i>Start bit</i>	<i>Size (bits)</i>	<i>Notes</i>
CCSDS Version (always 0)	0	3	
CCSDS Packet Type (0=telemetry)	3	1	
Has secondary header (always 1)	4	1	
Application ID	5	11	
Packet grouping flags	16	2	0=intermediate, 1=first, 2=last, 3=no group
Packet Sequence Counter	18	14	
Packet Length	32	16	Packet Length: Number of bytes following this field - 1
Mission Elapsed Time	48	32	
Whole second start of HOPE Spin (sec)	80	8	
Subsecond start of HOPE Spin (msec)	88	16	
Whether STARTs are included	104	1	Denotes whether start counts are included in the data product. 0=No, 1=Yes

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	24 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM



Whether STOPs are included	105	1	Denotes whether stop counts are included in the data product. 0=No, 1=Yes
Start no Stop	106	1	Denotes whether start-no-stop counts are included in the data product. 0=No, 1=Yes
Stop no Start	107	1	Denotes whether stop-no-start counts are included in the data product. 0=No, 1=Yes
TOF 0	108	1	Denotes whether TOF0 (H+) counts are included in the data product. 0=No, 1=Yes
TOF 1	109	1	Denotes whether TOF1 (He+) counts are included in the data product. 0=No, 1=Yes
TOF 2	110	1	Denotes whether TOF2 (O+) counts are included in the data product. 0=No, 1=Yes
TOF Unknown	111	1	Denotes whether TOF_UNK (unclassified valids) counts are included in the data product. 0=No, 1=Yes
Number of Energies	112	8	Number of energies that were sampled
Header Checksum	120	8	8-bit XOR checksum of the packet header
Hydrogen, Energy Bin 0	128	96	See Table 10 for bin format
Hydrogen, Energy Bin 1	224	96	See Table 10 for bin format
Hydrogen, Energy Bin 2	320	96	See Table 10 for bin format
Hydrogen, Energy Bin 3	416	96	See Table 10 for bin format
Helium, Energy Bin 0	512	96	See Table 10 for bin format
Helium, Energy Bin 1	608	96	See Table 10 for bin format
Helium, Energy Bin 2	704	96	See Table 10 for bin format
Helium, Energy Bin 3	800	96	See Table 10 for bin format
Oxygen, Energy Bin 0	896	96	See Table 10 for bin format
Oxygen, Energy Bin 1	992	96	See Table 10 for bin format
Oxygen, Energy Bin 2	1088	96	See Table 10 for bin format
Oxygen, Energy Bin 3	1184	96	See Table 10 for bin format
Spare	1280	3	
ESA Table	1283	4	Which ESA table was used during the acquisition of this data. ESA table 0 is the nominal table; if any table other than 0 is reported here, then the preceding data may not correspond to the expected energy values.
Parity Error	1287	1	Whether or not a parity error was detected when reading the science data out of the acquisition buffer. 0=no error, 1=error
Checksum	1288	8	8-bit xor checksum of all preceding data (including CCSDS header)

**Table 9. ECT/HOPE Space Weather Packet for electrons (APID 0x22D)**

<i>Description</i>	<i>Start bit</i>	<i>Size (bits)</i>	<i>Notes</i>
CCSDS Version (always 0)	0	3	
CCSDS Packet Type (0=telemetry)	3	1	
Has secondary header (always 1)	4	1	

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	25 of 36

Released

<b>Application ID</b>	5	11	
<b>Packet grouping flags</b>	16	2	0=intermediate, 1=first, 2=last, 3=no group
<b>Packet Sequence Counter</b>	18	14	
<b>Packet Length</b>	32	16	Packet Length: Number of bytes following this field - 1
<b>Mission Elapsed Time</b>	48	32	
<b>Whole second start of HOPE Spin (sec)</b>	80	8	
<b>Subsecond start of HOPE Spin (msec)</b>	88	16	
<b>Whether STARTs are included</b>	104	1	Denotes whether start counts are included in the data product. 0=No, 1=Yes
<b>Whether STOPs are included</b>	105	1	Denotes whether stop counts are included in the data product. 0=No, 1=Yes
<b>Start no Stop</b>	106	1	Denotes whether start-no-stop counts are included in the data product. 0=No, 1=Yes
<b>Stop no Start</b>	107	1	Denotes whether stop-no-start counts are included in the data product. 0=No, 1=Yes
<b>TOF 0</b>	108	1	Denotes whether TOF0 (H+) counts are included in the data product. 0=No, 1=Yes
<b>TOF 1</b>	109	1	Denotes whether TOF1 (He+) counts are included in the data product. 0=No, 1=Yes
<b>Electron, Energy Bin 0</b>	128	96	See Table 10 for bin format
<b>Electron, Energy Bin 1</b>	224	96	See Table 10 for bin format
<b>Electron, Energy Bin 2</b>	320	96	See Table 10 for bin format
<b>Electron, Energy Bin 3</b>	416	96	See Table 10 for bin format
<b>Spare</b>	512	3	
<b>ESA Table</b>	515	4	Which ESA table was used during the acquisition of this data. ESA table 0 is the nominal table; if any table other than 0 is reported here, then the preceding data may not correspond to the expected energy values.
<b>Parity Error</b>	519	1	Whether or not a parity error was detected when reading the science data out of the acquisition buffer. 0=no error, 1=error
<b>Checksum</b>	520	8	

**Table 10. ECT/HOPE Contents of Energy Bins**

<i>Description</i>	<i>Start bit</i>	<i>Size (bits)</i>
<b>Pixel 1, Azimuth 0</b>	0	8
<b>Pixel 2, Azimuth 0</b>	8	8
<b>Pixel 3, Azimuth 0</b>	16	8
<b>Pixel 3, Azimuth 45</b>	24	8
<b>Pixel 3, Azimuth 90</b>	32	8
<b>Pixel 3, Azimuth 135</b>	40	8
<b>Pixel 3, Azimuth 180</b>	48	8
<b>Pixel 3, Azimuth 225</b>	56	8
<b>Pixel 3, Azimuth 270</b>	64	8
<b>Pixel 3, Azimuth 315</b>	72	8

FSCM NO.	SIZE	DRAWING NO.	REV.
<b>88898</b>	<b>A</b>	<b>7417-9100</b>	<b>-</b>
SCALE	DO NOT SCALE PRINT	SHEET	26 of 36

Released

Pixel 4, Azimuth 0	80	8
Pixel 5, Azimuth 0	88	8

#### 7.4 ECT/MAGEIS SPACE WEATHER DATA

Space Weather data is output from three of the MagEIS instruments. The Low instrument, Med75, and High instrument will generate Space Weather packets. The Med35 will not generate Space Weather but will retain the capability to do so in the flight software. The output is compressed from 24 to 10 bits. Each data packet will be output once per spin and will contain data for 8 spin sectors. The cadence for Space Weather can be set by a Parameter command.

The MagEIS Space Weather format for the Low, Med75 and Med35 instruments is shown in the table 11. The data following the header consists of 4 bytes corresponding to three 10-bit space-weather words packed together in order from lowest energy channel to highest energy channel and then followed by two zeros. Each 4-byte set corresponds to one sector starting from the first sector following the spin boundary. Note (red asterisk below) that the data is compressed into 4 packed bytes per sector. The last two bits of each sector are padded zero and should be ignored.

**Table 11. ECT/MagEIS Space Weather Packet for Low (APID 0x34A), Medium 35 (0x35A), and Medium 75 (APID 0x36A) (electrons)**

Field Description	Start bit	Size (bits)	Note
CCSDS Version	0	3	Value is always zero
Packet Type	3	1	0 = telemetry
Secondary Header Flag	4	1	1 = has secondary header
APID	5	11	APID is value plus offset based on MAGEIS' allocated APID range
Grouping Flags	16	2	3 = not part of group
Sequence Count	18	14	Increments with each new packet
Packet Length	32	16	Data size, number of bytes following the "Packet Length" minus 1, (value is always ODD)
MET seconds	48	32	Spin time in MET
MAGEIS fine time	80	16	fine time (ms) from MET
e-Space Weather Data*	96	256	Sector -> Channel -> 10 bits

The MagEIS High instrument contains two Space Weather packets: one for Electrons and one for Protons. The Electron Packet is shown in Table 12. The packing of the electron data is different for the High than the Low and Medium instruments. In the High instrument, there is only one electron channel and the 10-bit data items are output sequentially for each sector, starting from the first sector after the spin boundary. This requires exactly 10 bytes for the entire spin's worth of data, so there is no zero fill. The Proton Packet is shown in Table 13. The packing of proton data is identical as the electron data in the High instrument.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	27 of 36

**Table 12. ECT/MagEIS Space Weather Packet for High (electrons) (APID 0x375)**

Field Description	Start bit	Size (bits)	Note
CCSDS Version	0	3	Value is always zero
Packet Type	3	1	0 = telemetry
Secondary Header Flag	4	1	1 = has secondary header
APID	5	11	APID is value plus offset based on MAGEIS' allocated APID range
Grouping Flags	16	2	3 = not part of group
Sequence Count	18	14	Increments with each new packet
Packet Length	32	16	Data size, number of bytes following the "Packet Length" minus 1, (value is always ODD)
MET seconds	48	32	Spin time in MET
MAGEIS fine time	80	16	fine time (ms) from MET
e-Space Weather Data*	96	80	Sector -> Channel -> 10 bits

**Table 13. ECT/MagEIS Space Weather Packet for High (protons) (APID 0x382)**

Field Description	Start bit	Size (bits)	Note
CCSDS Version	0	3	Value is always zero
Packet Type	3	1	0 = telemetry
Secondary Header Flag	4	1	1 = has secondary header
APID	5	11	APID is value plus offset based on MAGEIS' allocated APID range
Grouping Flags	16	2	3 = not part of group
Sequence Count	18	14	Increments with each new packet
Packet Length	32	16	Data size, number of bytes following the "Packet Length" minus 1, (value is always ODD)
MET seconds	48	32	Spin time in MET
MAGEIS fine time	80	16	fine time (ms) from MET
e-Space Weather Data*	96	80	Sector -> Channel -> 10 bits

The MagEIS Space Weather data is compressed from 24 bits to 10 bits. The conversion is shown in table 14.

**Table 14. ECT/MagEIS Compression Data (applies to all MagEIS instruments)**

Compression #	Compression Name	Compression Type	Bits	Conversion	Units
1	24 bits to 10 bits	5 bit Exponent followed by 5 bit Significand	10	$S \times 2^E$	counts

## 7.5 ECT/REPT SPACE WEATHER DATA

**Table 15. ECT/REPT Space Weather Packet (APID 0x201)**

Field Name	Start Bit	Size (bits)	Description
CCSDS Version	0	3	Value always 0

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	28 of 36

<b>Packet Type</b>	3	1	0 = telemetry
<b>Sec. Hdr. Flag</b>	4	1	1 = secondary header included
<b>Application ID</b>	5	11	0x200 – 0x20A = indicates type of packet
<b>Grouping Flags</b>	16	2	3 = Not part of group
<b>Sequence Count</b>	18	14	Increments with each packet
<b>Packet Length</b>	32	16	Size of data and secondary header minus 1
<b>MET Seconds</b>	48	32	Time of packet transmission
<b>Singles Counter 2</b>	80	12	
<b>Singles Counter 4</b>	92	12	
<b>Singles Counter 9</b>	104	12	
<b>REPT_INST_ID</b>	116	2	
<b>Pad</b>	118	10	
<b>Checksum</b>	128	16	

## 7.6 RBSPICE SPACE WEATHER DATA

**Table 16. RBSPICE Space Weather Packet (APID 0x311)**

Name	Start bit	Length (bits)	Description
<b>Version</b>	0	3	Designates a source packet
<b>Type</b>	3	1	Designates a telemetry packet
<b>Secondary?</b>	4	1	Secondary header is present
<b>APID</b>	5	11	Application Process ID
<b>Grouping</b>	16	2	Grouping flags
<b>Sequence Count</b>	18	14	Continuous sequence count for each Application Process ID
<b>Length</b>	32	16	Packet length (bytes) – 1
<b>Secondary Header</b>	48	32	Time tag (MET)
<b>Spin</b>	80	16	Spin number of integration
<b>No. Fast</b>	96	8	Number of fast values (NF)
<b>No. Slow</b>	104	8	Number of slow values (NS)
<b>Fast 0 Chans – 45KeV</b>	112	NF * 10	Low energy, high-time resolution space weather rates. There are 4*NF values where NF = 36
<b>Fast 1 Chans – 100KeV</b>	472	NF * 10	Low energy, high-time resolution space weather rates. There are 4*NF values where NF = 36
<b>Fast 0 Chans – 148 KeV</b>	832	NF * 10	Low energy, high-time resolution space weather rates. There are 4*NF values where NF = 36
<b>Fast 0 Chans – 269 KeV</b>	1192	NF * 10	Low energy, high-time resolution space weather rates. There are 4*NF values where NF = 36
<b>Slow 0 Chans – 1 MeV(TBR)</b>	1552	NS * 10	High energy, low-time resolution space weather rates. There are 2*NS values where NS = 4
<b>Slow 1 Chans - 10 MeV(TBR)</b>	1592	NS * 10	High energy, low-time resolution space weather rates. There are 2*NS values where NS = 4
<b>Pad</b>	1632	0 - 15	Zero pad to 16-bit boundary

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	29 of 36

Released

## 7.7 PSBR/RPS SPACE WEATHER DATA

**Table 17. PSBR/RPS Rate & Housekeeping Packet (& Space Weather) (APID 0x2C1)**

Description	Start bit	Size bit
CCSDS Version = 0	0	3
Packet Type = 0 (telemetry)	3	1
Secondary Header Flag = 1 (set)	4	1
Application ID = 0x2C1	5	11
Grouping Flags = 3 (not part of group)	16	2
Sequence Count (increment with each output packet)	18	14
Packet Length = 31	32	16
MET Seconds = packet time	48	32
PEN rate	80	16
CHE rate	96	16
Various RPS Housekeeping Data	112	160
Spare (Dosimeter1 linear mon.) *	272	8
Spare (Dosimeter1 log mon.) *		
Spare (Dosimeter2 linear mon.) *		
Spare (Dosimeter2 log mon.) *		
RPS Housekeeping Data.	280	8
Spare = 0xA5	288	8
Checksum	296	8

\* The dosimeter data is multiplexed over 4 packets

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 30 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM

## 8 PREDICTED EPHEMERIS FILES

The predicted ephemeris files will be available from the RBSP MOC 60 days in advance. The details of this file are given below in Table 18:

**Table 18: Predicted Ephemeris**

<i>Name</i>	Ephemeris Prediction
<i>File Name</i>	scid_yyyy_doy_##.peph.bsp; peph_scid_yyyy_doy_##.peph.xsp (where yyyy_doy is the first date in the file)
<i>Originator</i>	Navigation
<i>User</i>	MOC, Ground Stations, TDRSS, SOC, SDP
<i>Transfer Protocol</i>	sftp from MOC Data Server
<i>Availability</i>	1-2 times per week
<i>Frequency</i>	1-2 times per week
<i>Initiation</i>	Automatic
<i>Action</i>	Generate, Store
<i>Format</i>	SPICE Planetary Ephemerides Kernel (SPK), binary (nominal) (bsp) and transfer (xsp) formats
<i>Contents</i>	Position and velocity of each spacecraft as a function of time. Will likely be Earth-centered inertial vectors (i.e. vectors expressed in EME2000 reference frame) SPICELIB tools allow querying for vectors in many other coordinate systems. Data extrapolated for 60 days.
<i>Purpose</i>	To predict where the two satellites will be in the future

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 31 of 36

Released

## 9 SPACE ASSET PROTECTION POLICY IMPLICATIONS

Space asset protection policy will have an impact on RBSP space weather data. The spacecraft position information (which must be provided to other ground stations to receive the data) will need to have a control process (e.g. signed MOU with other organizations to restrict access to this data). Making the agreements with the ground station providers is the responsibility of NASA HQ.

The space weather measurements made on the spacecraft will have to be combined (by the user of the data) with spacecraft position in order to be useful. It is expected that the data users will download the predicted spacecraft ephemeris files for this purpose. Since the predict file will be produced 60 days in advance, this information will have some uncertainties, but will be sufficiently accurate for scientific purposes. For the real-time broadcast, the complete spacecraft tracking information will be provided to the participating ground stations who will use this information to track the spacecraft.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 32 of 36

Released



## 10 INSTITUTIONAL RESPONSIBILITIES

### 10.1 RADIATION BELT STORM PROBES MISSION

The responsibility of the RBSP Mission is to broadcast the selected space weather data at all times through the primary spacecraft science downlink antennas when an observatory is not in a primary mission-related ground contact. It is a goal for the instrument SOC's to provide a space weather product from their prime science data within a few days to compensate for any data gaps due to unavailability of observatory or poor orbit geometry.

### 10.2 NASA PROGRAM OFFICE

The responsibility of the program office at NASA headquarters is to recruit ground stations to participate in receiving and relaying RBSP Space Weather Broadcast data consonant with the arrangements described above. NASA HQ also provides the programmatic interface between the users and the RBSP Project.

### 10.3 GROUND STATION PARTNERS

The responsibility of each ground station will be the subject of an agreement between NASA and the ground station operator. The Space Weather data customer is responsible for working with their selected ground station to maintain the RF link analyses, including the determination of receiver loop bandwidth settings based on orbit geometry and carrier tracking requirements.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 33 of 36

## 11 COMMUNICATION BETWEEN RBSP AND THE PARTICIPATING GROUND STATIONS

Technical communications between the RBSP mission and the participating ground station partners will be by email and telephone during normal business hours.

The RBSP Mission Operations Center (MOC) is designed to operate without human interaction. MOC personnel will only be available on a regular basis during normal business hours. The MOC will supply the ground station partners with contact information, in case of problems, which will be addressed as rapidly as feasible.

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 34 of 36

Released

## APPENDIX A: ACRONYMS

ACE	Advanced Composition Explorer
APID	Application Identifier (in a CCSDS telemetry packet header)
C&DH	Command and Data Handling
CCSDS	Consultative Committee for Space Data Systems
CHE	1-second coincidence rates as fluxes >400 ~MeV protons
CLCW	Command Link Control Word
ECT	Energetic Particle Composition and Thermal Plasma Investigation
EFW	Electric Field and Waves Instrument
EMFISIS	Electric and Magnetic Field Instrument Suite and Integrated Science Investigation
GSFC	Goddard Space Flight Center
HOPE	Helium-Oxygen-Proton-Electron Spectrometer Instrument
ICD	Interface Control Document
JHU/APL	Johns Hopkins University Applied Physics Laboratory
LEO	Low Earth Orbit
LWS	Living With a Star
MagEIS	Magnetic Electron Ion Spectrometer
MEO	Medium Earth Orbit
MET	Mission Elapsed Time
MOU	Memorandum of Understanding
MOC	Mission Operation Center
MRD	Mission Requirements Document
NASA	National Aeronautics and Space Administration
PEN	1-second coincidence rates as fluxes >50 ~MeV protons
PSBR	Proton Spectrometer Belt Research
RBSP	Radiation Belt Storm Probes
RBSPICE	Radiation Belt Storm Probes Ion Composition Experiment
REPT	Relativistic Electron Proton Telescope Instrument

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT	SHEET	35 of 36

Released

07/23/2012 11:37 Rev - UNCONTROLLED OUTSIDE OF PLM

RPS	Relativistic Proton Spectrometer Instrument
RF	Radio Frequency
SDMP	Science Data Management Plan
SOC	Science Operation Center
SSPA	Solid State Power Amplifier
STARD	Science Team Allocated Requirements Document
STEREO	Solar TERrestrial RELations Observatory
TBD	To Be Determined
TBR	To Be Revised
UTC	Universal Time Coordinated
VC	Virtual Channel

FSCM NO.	SIZE	DRAWING NO.	REV.
88898	A	7417-9100	-
SCALE	DO NOT SCALE PRINT		SHEET 36 of 36

Released